Electronic reading & writing device

E65

User manual

To view the User manual while using the device, refer to **Books**.

Access a specific page

1. Tap  at the bottom of the screen.
2. Enter a page number.
3. Tap **GO**.

View the table of contents

1. Tap **Menu** → **Chapter** to view the table of contents for the current document.
2. Tap a chapter.

Contents

Get started 5

Unpack 5
Get to know your device 6
Insert the battery 11
Charge the battery 13
Turn on the device 16
Use the stylus 18
Insert a memory card (optional) 21
Copy files 22
Send or receive files via EmoLink 26
Access a menu 30
Get to know the Home screen 31
Customize basic settings 36
Register your device to Adobe Digital Editions (ADE) ... 38

Books 41

View content files on the device 41
View content files on a TV screen 50
Use bookmarks 51
Use highlights 52
Delete books 55

Bookstore 56

Notes **57**
Create notes 57
View notes 63
Delete notes 67

Calendar **69**
Create events 69
View events 70
Delete events 73
View Microsoft Outlook schedules 74

Dictionary **77**
Look up a word 77
View search results 78

Music **81**
Play music files 81
Delete music files 84

Images **85**
View images 85
Delete images 90

Settings **91**

Appendix **101**

Reset the device 101
Install and use the Virtual Printer 103
Update firmware 105
Troubleshooting 107
Specifications 110
Open Source License 112
Index 135

	Warning - situations that could cause injury to yourself or others
	Caution - situations that could cause damage to your device or other equipment
	Note - notes, usage tips, or additional information

Get started

Unpack



E65 device



Battery (1)



Stylus

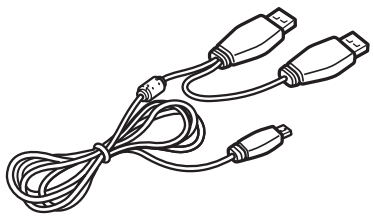

USB cable



Quick Start Manual



CD-ROM
(User manual, Virtual Printer, and Samsung Outlook Sync)

Get to know your device

Device layout

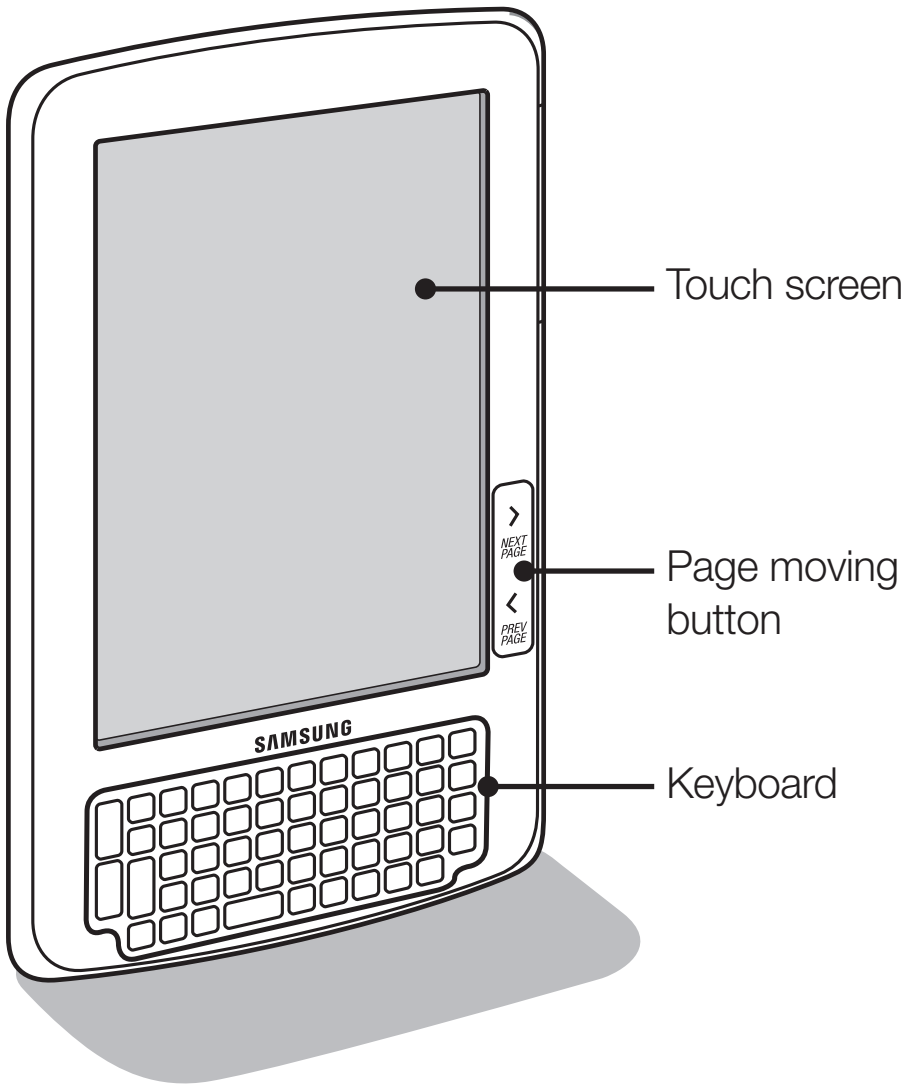

- This device recognizes inputs only from the provided stylus.
- When you use the device under direct sunlight, the touch screen may appear blurred, due to characteristics of the screen. This is not a malfunction of the device and the device will function normally if you avoid using it under direct sunlight.

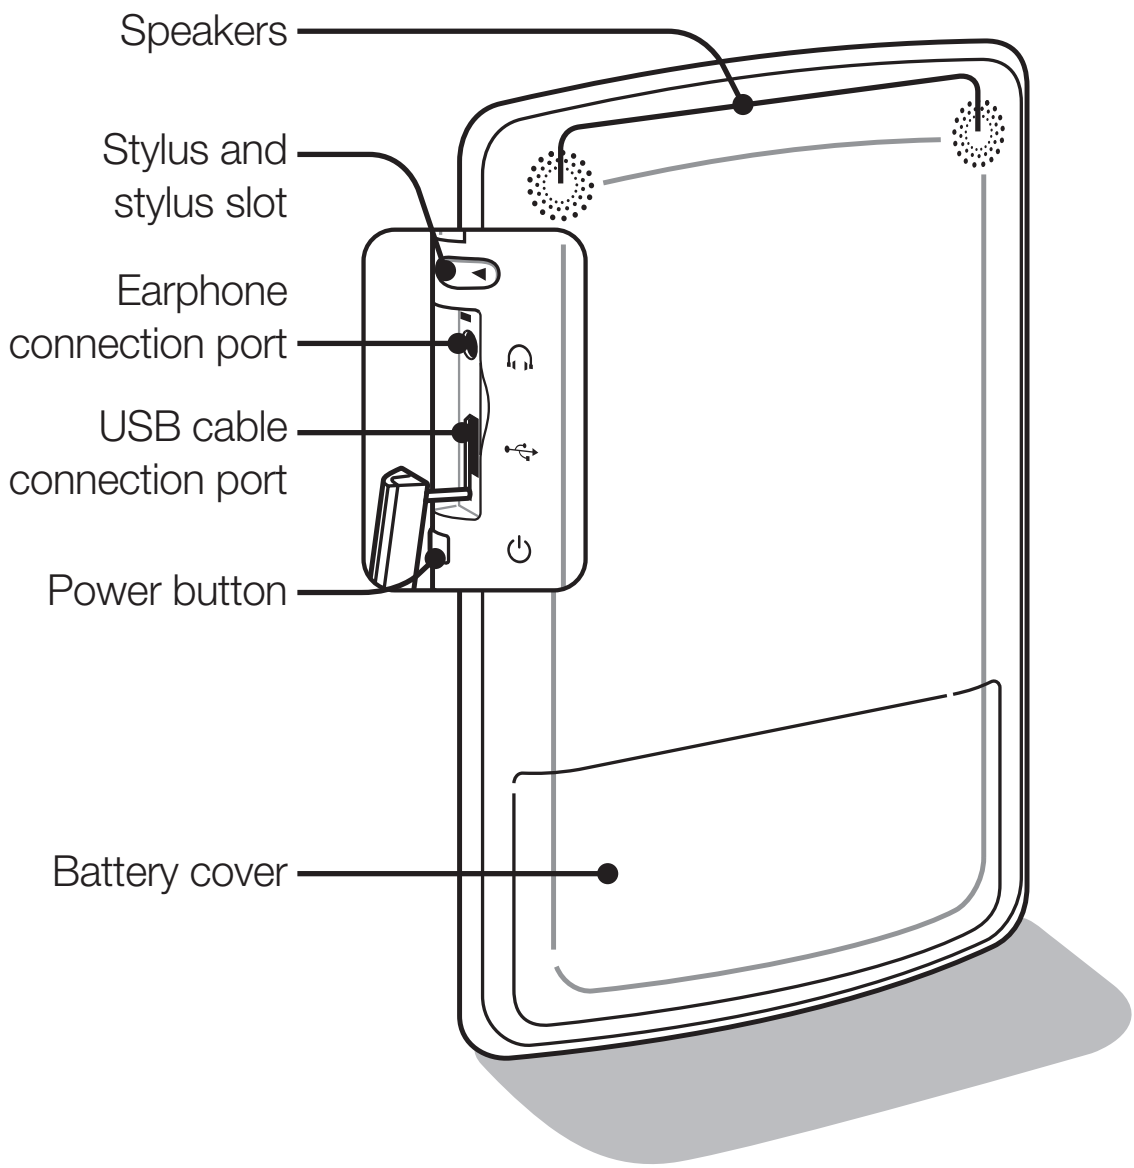
Speakers
Stylus and stylus slot
Earphone connection port
USB cable connection port
Power button
Battery cover

Buttons

Button	Function
	While reading a book • Return to the previous page • Return to the previous index or chapter (press and hold) While viewing a list of books • Move to the previous list page • Move to the first list page (press and hold)
	While reading a book • Move to the next page • Move to the next index or chapter (press and hold) While viewing a list of books • Move to the next list page • Move to the last list page (press and hold)
	Delete a letter
	Return to the Home screen (p. 31)

Button	Function
BACK	Return to the previous menu
MENU	Open a corresponding menu
Caps Shift	Input a capital letter
■*	Input a special character • Special characters you can input are in orange color on the keyboard
Fn*	Activate a shortcut function of a number button
	Insert a space
Alt Gr	Input diacritical marks
EmoLink	Activate the EmoLink function (p. 26)
▲ ◄ ►	Move left, right, up, or down

Button	Function
	Select a menu or function
	• Power on • Power off (press and hold) • Lock or unlock the touch screen while using functions (p.17)

* To input a special character or activate a shortcut function of a number button, press a corresponding button and then press an orange-colored special character or a number button. If you simultaneously press two buttons, it may not work.

Insert the battery

To insert the battery,

1 Remove the battery cover.

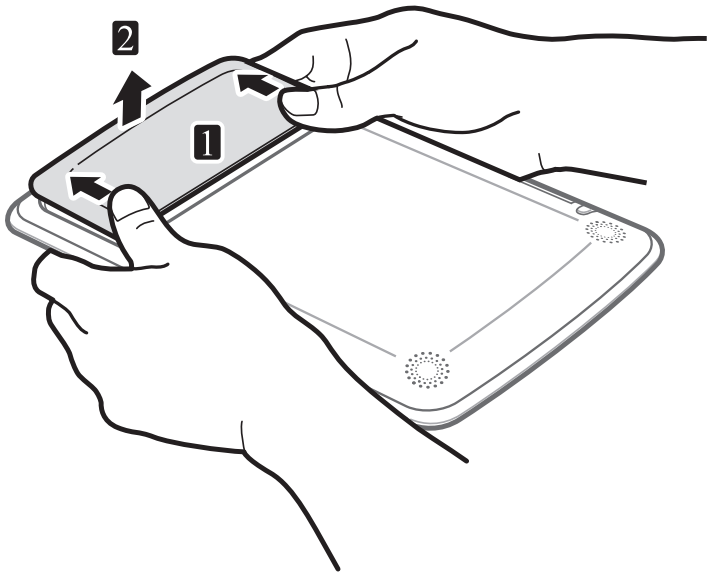

Be careful not to damage the touch screen by using too much pressure when you remove the battery cover.

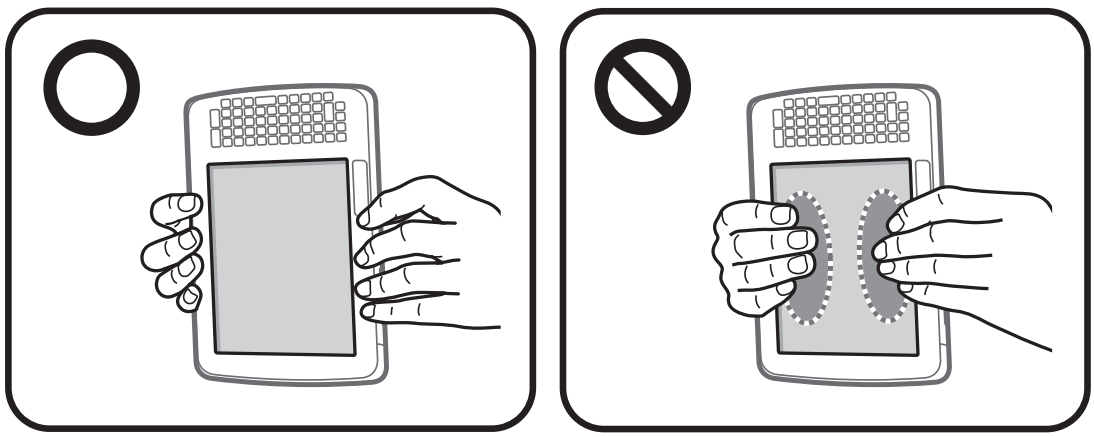

2 Insert the battery.

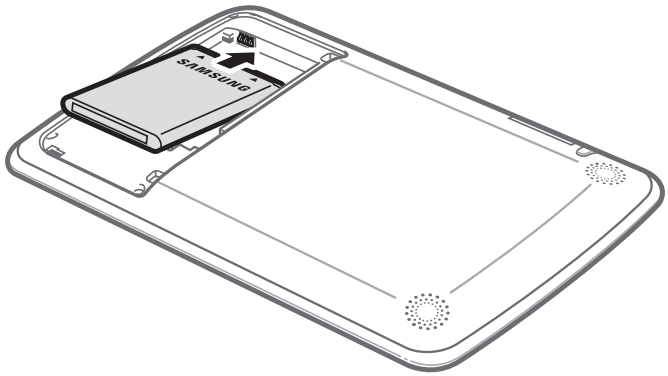

3 Replace the battery cover.

- Slide the battery cover fully into place.

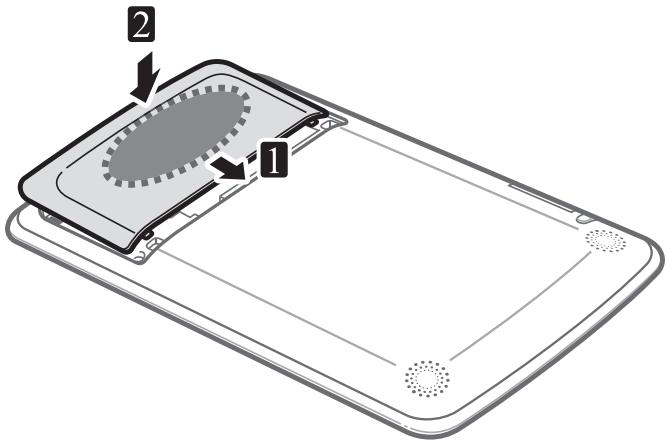

Remove the battery

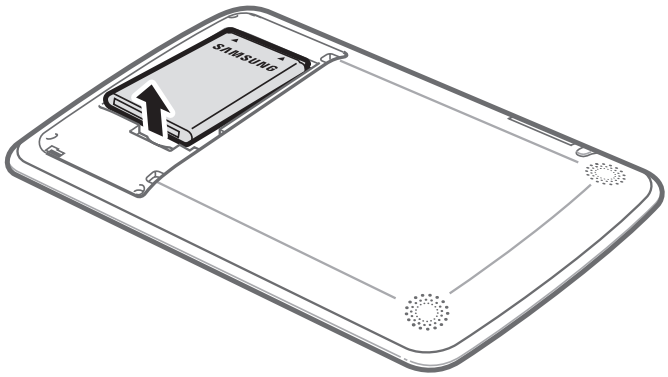

If the device is on, press and hold ⏻ to turn it off before removing the battery.

Charge the battery

To charge the battery,

1. Connect the smaller end of the USB cable to the device, and the USB connector and the secondary power connector to the USB port of a PC.
   - While charging the device, connect the secondary power connector to prevent damage to the device.

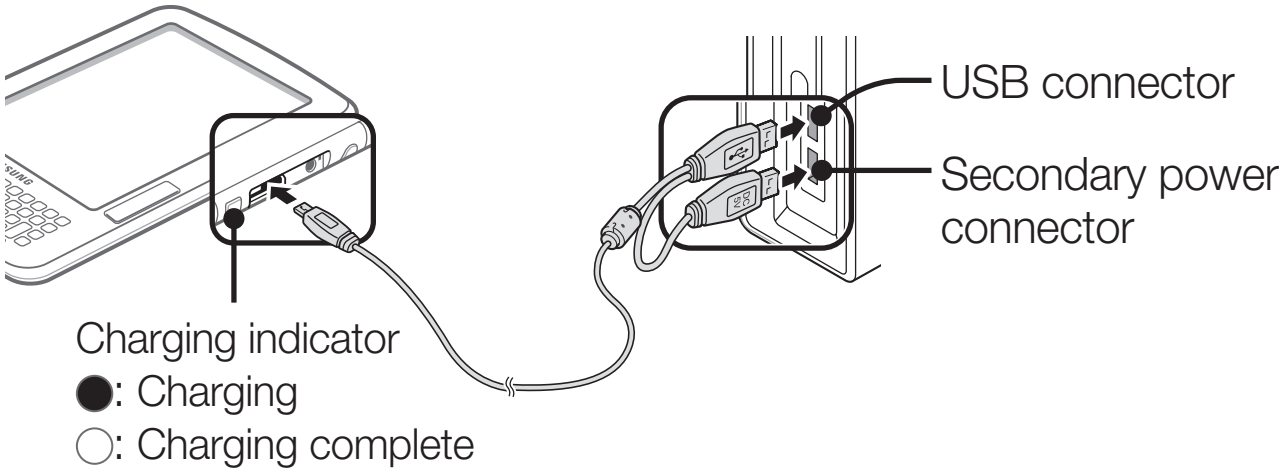

2 Select **No** to charge the device while using the device's functions.

- Select **Yes** to charge the device while using it as a removable disk. (Copy files → p. 22)
- The device recognizes inputs only from the provided stylus.

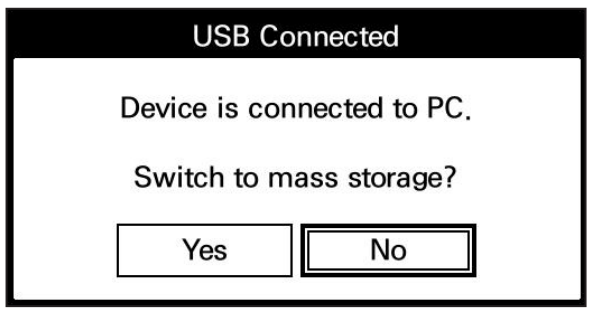

3 Disconnect the USB cable when charging is complete.

- When charging is complete, the charging indicator will turn off.

When you connect the USB cable to the device while using it, you can charge the battery whether or not you use the device as a removable disk.

Charging and operating time of the battery

- Charging time is approximately 4 hours.
- With a fully charged battery, you can use the device as follows.
  - Reading: 20 hours (if switching pages at 20 seconds interval)
  - Writing: 5 hours (if writing continuously)
  - Listening to music: 10 hours (if listening to music with the earphones continuously)
- The charging and operating time of the battery may vary according to the charging condition, environment, and length of use.
- Do not connect the device to a PC via a USB hub. The battery may not be charged properly.
- When charging the battery with a laptop, ensure that the laptop has an adequate power supply.

- The battery will consume power even when the device is not in use and the maximum operating time will gradually shorten. If the maximum operating time decreases by more than half, it is time to buy a new battery.

Turn on the device

Turn on or off

Press ⏻ to turn the device on. To turn the device off, press and hold ⏻.

- While the device is turning on, ⏻ turns blue.
- The first time you turn on the device, a user manual will appear before activating the Home screen. (p. 31)

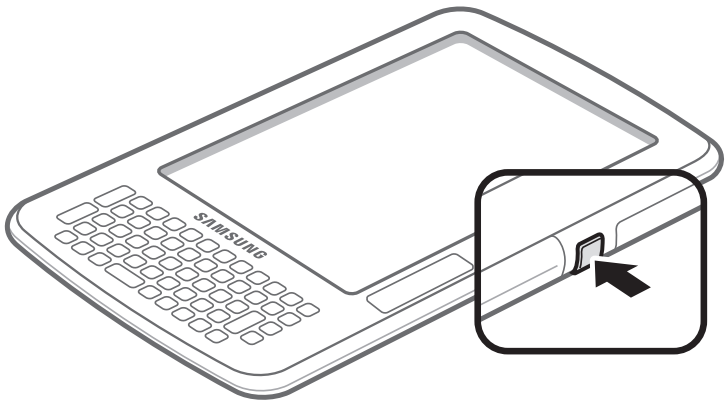

Due to the electronic paper capabilities of the touch screen, the last data viewed may remain on the screen if you remove the battery while the power is switched on.

Lock or unlock the touch screen

If you do not use the screen for an extended period of time or if you press ⏻ when the device is in use, the touch screen and buttons will become locked.

To unlock the touch screen, press ⏻.

- The touch screen will turn on.

- You can change the time delay that locks the touch screen. (Sleep Timer → p. 92)
- When you lock the touch screen, it will take 2-3 seconds to save the current data. If you attempt to unlock the touch screen during this time, the device may not work properly.

Use the stylus

With the stylus, you can select menus, perform functions, or write on the screen. The device only recognizes inputs from the provided stylus. Use caution to avoid losing it.

Store the stylus

Push the stylus into the stylus slot.

- Push the stylus until it locks in place.

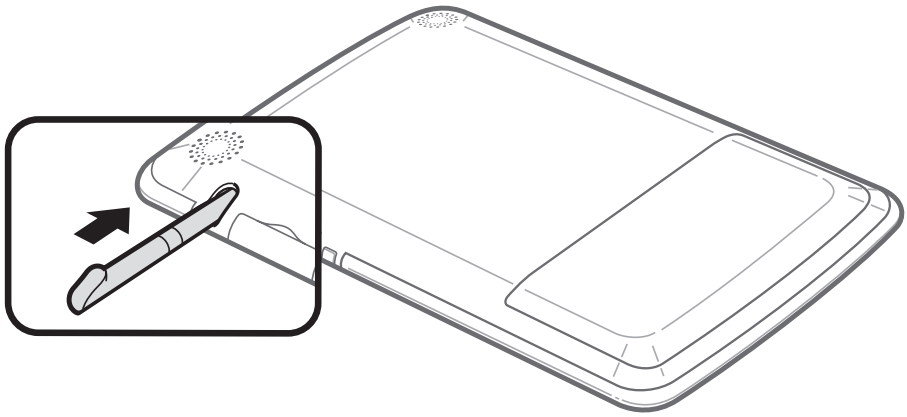

- To remove the stylus, pull the stylus out of the stylus slot.
- If you lose your stylus, you can buy a new one from a Samsung service center.

Work with the stylus

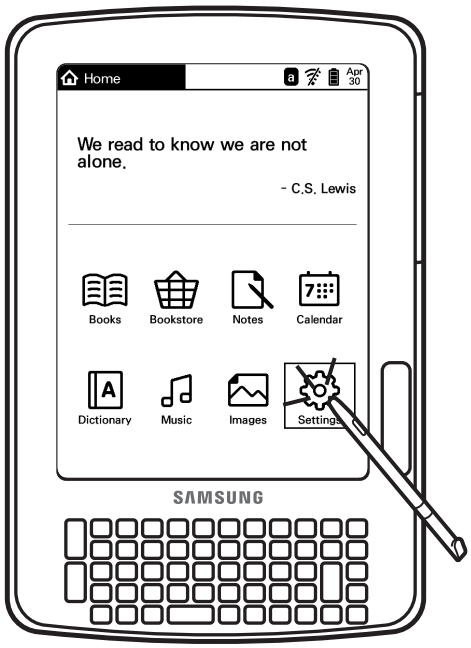

Tap menus or options with the tip of the stylus.

Write characters on the touch screen.

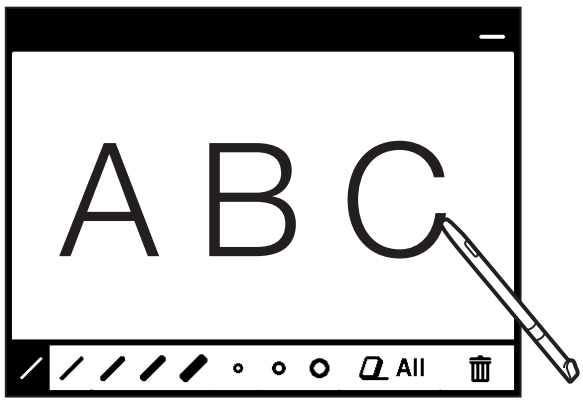

Draw a line to select text.

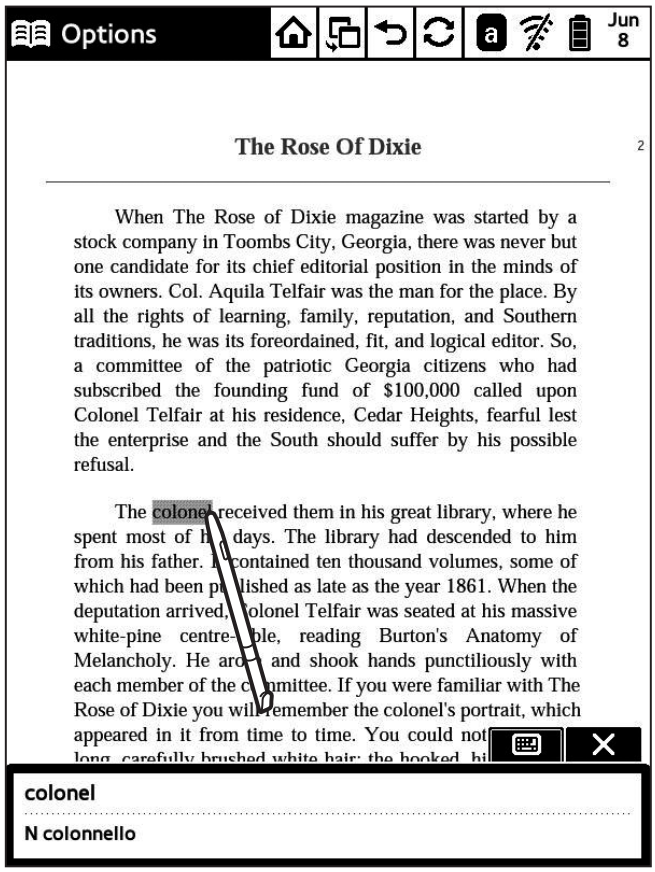
Options
Jun 8
The Rose Of Dixie
2
When The Rose of Dixie magazine was started by a stock company in Toombs City, Georgia, there was never but one candidate for its chief editorial position in the minds of its owners. Col. Aquila Telfair was the man for the place. By all the rights of learning, family, reputation, and Southern traditions, he was its foreordained, fit, and logical editor. So, a committee of the patriotic Georgia citizens who had subscribed the founding fund of $100,000 called upon Colonel Telfair at his residence, Cedar Heights, fearful lest the enterprise and the South should suffer by his possible refusal.
The colonel received them in his great library, where he spent most of h days. The library had descended to him from his father. contained ten thousand volumes, some of which had been pu lished as late as the year 1861. When the deputation arrived, olonel Telfair was seated at his massive white-pine centre- ble, reading Burton's Anatomy of Melancholy. He aro and shook hands punctiliously with each member of the c mmittee. If you were familiar with The Rose of Dixie you will remember the colonel's portrait, which appeared in it from time to time. You could not
colonel
N colonnello

- The stylus may not work properly when wet. Do not allow the stylus to come in contact with liquids.
- If you drop the stylus, the tip may be damaged and the stylus may not work properly. Use caution to avoid dropping it.
- The touch screen may not recognize the stylus inputs if you hold it at an extreme angle. For example, there may be a maximum 1 mm error when using the stylus at a 30° angle.

Insert a memory card (optional)

You can store large files or important data on a memory card. The device supports microSD or microSDHC cards up to 16 GB. The maximum capacities may vary depending on the memory card manufacturer.

To insert a memory card,

1. Turn off the device.
2. Remove the battery cover and battery.
3. Slide a memory card into the memory card slot as shown.

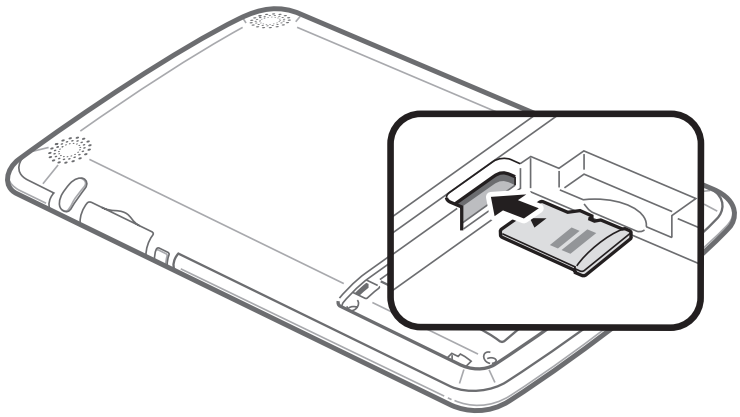

4. Replace the battery and the battery cover.

- Attempting to insert a memory card with the battery installed may damage the device or memory card.
- When you insert a memory card, **Books**, **Notes** folders will be created automatically. Note and purchased content files should be stored in the appropriate folder, but music and image files can be stored in any folder.
- While using the device, do not remove and reinsert a memory card. If you do, the device may not recognize the memory card.
- The supported memory card capacity is based on Samsung's test standards. It may vary depending on the memory card manufacturer.

Copy files

Transfer books, dictionaries, images and music files from a PC to your device. You can also transfer notes and schedule files from your device to a PC.

To copy files to or from your device,

1. Connect the device to a PC with the USB cable.
   - The pop-up window appears.
2. Tap **Yes**.
   - The **Removable Disk** screen appears.
3. Click **Open folder to view files** → **OK**.
   - Or, double-click **My Computer** on the desktop and the removable disk icon.
   - The name of the removable disk may vary by PC.
4. Open a folder you want.

Folder	Function
Firmware_Update	New firmware files to be upgraded
Books/Dictionary/ Images/Calendar/ Notes/Music*	Books, dictionaries, images, schedules, notes, and music files saved on the device

* Do not change the folder or file names. If you do, the device may not work properly, or it may take longer for the device to turn on after ending the mass storage connection.

5 Drag and drop or copy and paste files between the PC and the device.

- Do not disconnect the USB cable or turn the device off while copying files. This may result in loss of data or damage to the device.
- Do not connect the device to a PC via a USB hub.
- When you copy files to the device, place in the appropriate folder. For example, if you place a book file into a dictionary folder, the book file will not be viewable.
- If you transfer unsupported files, they may not appear on the file list. Ensure that the files you transfer are supported by the device. (Books → p. 41, Music → p. 81, Images → p. 85)
- The maximum capacity for the removable disk is 1.7 GB. When the device exceeds the maximum capacity, files will not be stored on the device.

End the mass storage connection

End the connection properly to prevent damage to the device or loss of your data.

1. Click on the Windows taskbar.
2. Click the pop-up message.
3. Disconnect the USB cable only when the message says that it is safe to remove the hardware.

- Do not disconnect the USB cable while files are being transferred as this could result in loss of data or damage to the device.
- You can not end the connection if you have device files open on the PC. Close all device files and attempt to end the connection.

Send or receive files via EmoLink

You can send or receive books, notes, music, and image files between devices that provide the EmoLink function. You can not transfer DRM-protected files via EmoLink. The maximum distance between devices using EmoLink is 20 meters in a straight line. This distance may be reduced according to the environment of an access point.

Initialize EmoLink

To use EmoLink, you must initialize it.

1. Press EmoLink and tap **Yes**.
2. Enter a device name and tap **Next**.
3. Tap **Yes** and read the EmoLink help.

Send a file via EmoLink

1. Open a file to send.
   - You can send files via EmoLink while reading books, viewing notes, listening to music, viewing images, or viewing file lists. (except for the notes lists)

2 Press EmoLink and tap **Yes**.

- The device will be connected to the other device via the direct connection mode. (p. 96)
- This step will not appear if the wireless network is active.

3 Press EmoLink.

4 Check the group name.

- The device belongs to the Samsung group by default.
- If the other device belongs to a different group, you can not transfer files via EmoLink. (Change the EmoLink group → p. 29)

To transfer a file to a device that belongs to a different group, select **Settings** → **Network** tab → **EmoLink** → **Change Group** and then tap ☑ next to **Allow devices of unknown group to join.**

5 Ask the other party to connect to your group and press EmoLink.

6 When the other device's name and connection alert appear, press EmoLink to transfer the file.

- After the transfer is complete, the devices will be disconnected. If you want to send a file again, reconnect the devices via EmoLink.

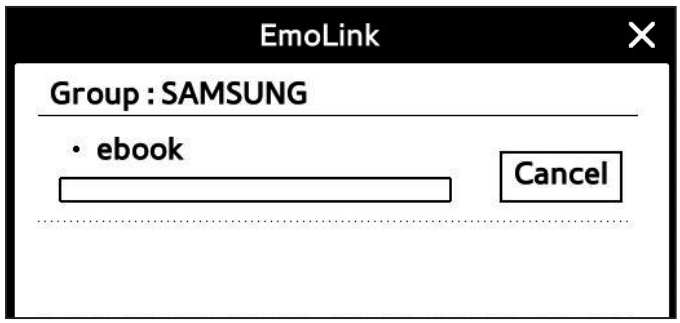

If the other party does not press EmoLink on the receiving device, the two devices will be disconnected automatically.

Receive a file via EmoLink

1 On a sending device, send a file via EmoLink. (p. 26)

2 Press EmoLink and tap **Yes**.

- This step will not appear if the wireless network is active.

3 Press EmoLink when the other party asks you to press it.

- The device will be connected to the other device via the direct connection mode. (p. 96)

4 Check the authorization screen.

5 When the sender presses EmoLink, the file will be received automatically.

6 Tap **View**.

- Received files are stored in the Inbox. Book files will appear in the list of books.
- After the transfer is complete, the devices will be disconnected. If you want to receive another file, reconnect the devices via EmoLink.

Change the EmoLink group

1 From the Home screen, tap **Settings**.

2 Tap **Network** tab → **EmoLink**.

3 Tap **Change Group**.

4 Tap **Edit** and enter a new group name.

5 Tap **OK**.

- The new group will be added and selected.
- Tap **Edit** to edit the group name.

Access a menu

You can access a menu by pressing buttons or touching it with the stylus. The following examples explain how to listen to music.

Use the stylus

1 Tap to open the Home screen.

2 Tap **Music**.

3 Tap a music file you want.

4 Listen to music.

Use buttons

1. Press HOME to open the Home screen.
2. Press ▲ ◀ ▶ to scroll to **Music** and then press ENTER.
3. Press ▲ ◀ ▶ to scroll to a music file you want and then press ENTER.
4. Listen to music.

Get to know the Home screen

The Home screen will be shown when the device turns on. You can view books or image files, and create notes or schedules. You can also listen to music, view a dictionary, and customize device settings.

Icon/Menu	Function
	Display the current activated function
	Display the keyboard input mode • : Small letter input mode • : Capital input mode • : Special character input mode • : Shortcut function mode • : Keyboard locked
	Display the wireless network status • : Off • : Directly connected • : Connected • : Not connected
	Battery icon • : Full • : Needs charging • : Low • : Charging
Apr 30	Display the current date

Icon/Menu	Function
Preview	Preview the last book you were reading (If you were not reading a book, the device displays a famous saying.)
Books	View your books and documents (p. 41)
Bookstore	Access the bookstore (p. 56)
Notes	Create and view notes (p. 57)
Calendar	Manage events (p. 69)
Dictionary	View the dictionary (p. 77)
Music	Listen to music (p. 81)
Images	View images (p. 85)
Settings	Customize settings (p. 91)

You can set a menu to display when the device is switched on. (Startup Mode → p. 93)

Activate the wireless network and lock the keyboard

1 Tap the corresponding part from the Home screen or while you are using a function.

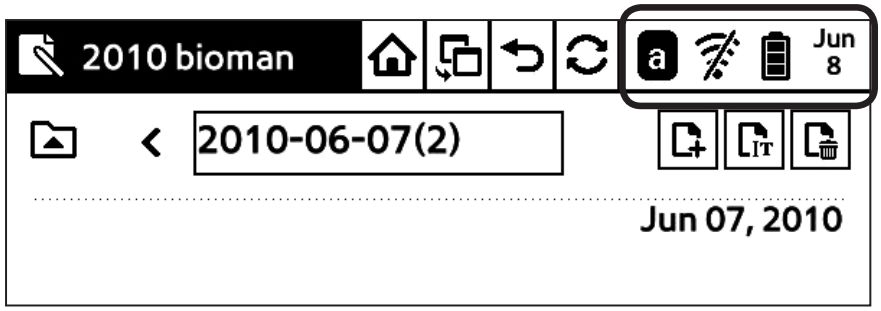

2 Turn the wireless network on, or lock the keyboard.

- You can also see the current time and date.

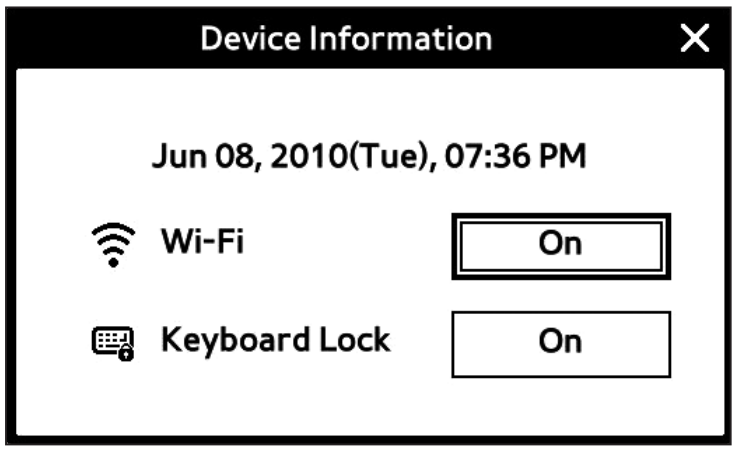

If you lock the keyboard, you can not enter text and activate a function using the keyboard.

Use the icons at the top of the screen

Tap an icon while using a function.

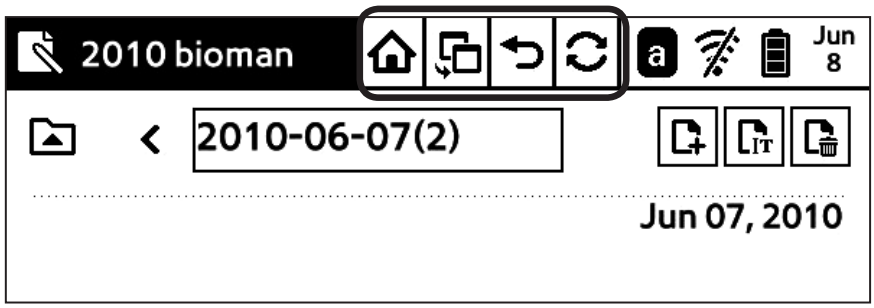

Icon	Function
	Return to the Home screen
	Open the shortcut window 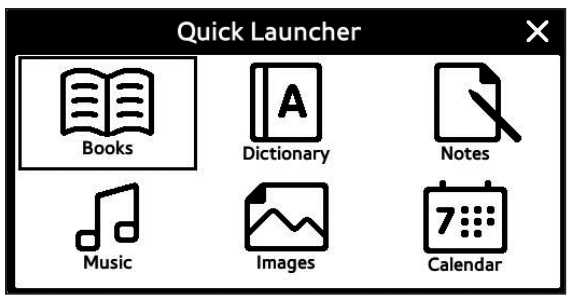 • **Books**: View the last book you were reading (p. 41) • **Dictionary**: Look up a word (p. 77) • **Notes**: Create a note (p. 57) • **Music**: Play music (p. 81) • **Images**: View an image (p. 85) • **Calendar**: View an event (p. 69)

Icon	Function
	Return to the previous menu
	Refresh

Customize basic settings

Select a language and set the current time and date. You can also change your device's password.

Select a language

1. From the Home screen, tap **Settings** → **Language**.
2. Tap a language.

Set current time/date and time zone

1. From the Home screen, tap **Settings** → **Clock Set**.
2. Tap , , numbers, or text to set the current time and date.
   - You can set the date and time from January 1 2000 1:00 A.M. to December 31 11:59 P.M.
3. Tap time zone box to set the local time.
4. Tap **OK**.

Change the password

1. From the Home screen, tap **Settings** → **Change Password**.
2. Enter the current password by tapping the virtual keys or pressing the buttons on the keyboard.
   - The default password is 0000.
3. Enter a new password and confirm it.
4. Tap **OK** to confirm.

Register your device to Adobe Digital Editions (ADE)

Your device must be authorized by Adobe Digital Editions (ADE) to view files with Adobe Reader. You can use the wireless network or a PC to register your device with Adobe Digital Editions. Before the authorisation, the current time/date and time zone must be set. (p. 37)

To register your device with Adobe Digital Editions using the wireless network,

1. Visit the Adobe Digital Editions web page (http://www.adobe.com/products/digitaleditions/) and create your Adobe account.
   - If you are already registered, you do not need to set up a new account.
2. Activate the wireless network. (p. 34)
3. Tap **Bookstore**.

4 Enter your user ID and password.

5 Tap **Activate** to register your device, and then tap **OK**.

If you do not want to purchase and download contents files from the bookstore on your device wirelessly, you can view files already downloaded and stored on your PC by copying them onto your device. For authorization, install the Adobe Digital Editions program on the PC.

To register your device with Adobe Digital Editions using a PC,

1 Visit the Adobe Digital Editions web page (http://www.adobe.com/products/digitaleditions/) and create your Adobe account.
- If you are already registered, you do not need to set up a new account.

2 Download and install the Adobe Digital Editions program on your PC.

3 When the installation is complete, double-click the Adobe Digital Editions icon on the desktop.

4 Connect the device with a USB cable to the PC.

5 Enter your user ID and password.

6 Tap **Activate** to register your device with the Adobe Digital Editions program.

Books

View personal content files (ePUB, PDF, TXT format) saved on the device. You can also view files on Samsung TVs that support AllShare. Content files are not saved on the device by default. Save content files to the device first. (Copy files → p. 22)

View content files on the device

To view content files on the device,

1. From the Home screen, tap **Books**.
   - Tap **Continue Reading** from the Home screen to view the last book you were reading.
2. Tap a book title.
   - From the book list, tap **Menu** to use the following options.

Option	Function
Sort	Select a sort option (By Recent Reading, By Recent Buy, By Title, By Author)
View	Select how to view the list of books (List, Thumbnail)

Option	Function
Search	Search a book by keyword
Book Info	View book details including publisher and genre
Add to Library	Add a book to your library (p. 47)
Edit	Delete a book (p. 55)
Screen Share On	View a book on a TV screen (p. 50)

- To download books, refer to the content provider's instructions.
- PDF files will not be displayed properly if they do not comply with the PDF/A standard.
- ePUB files may not be displayed properly if they do not comply with the ePUB standard of Adobe Reader.

3 Navigate the content files with the following icons.

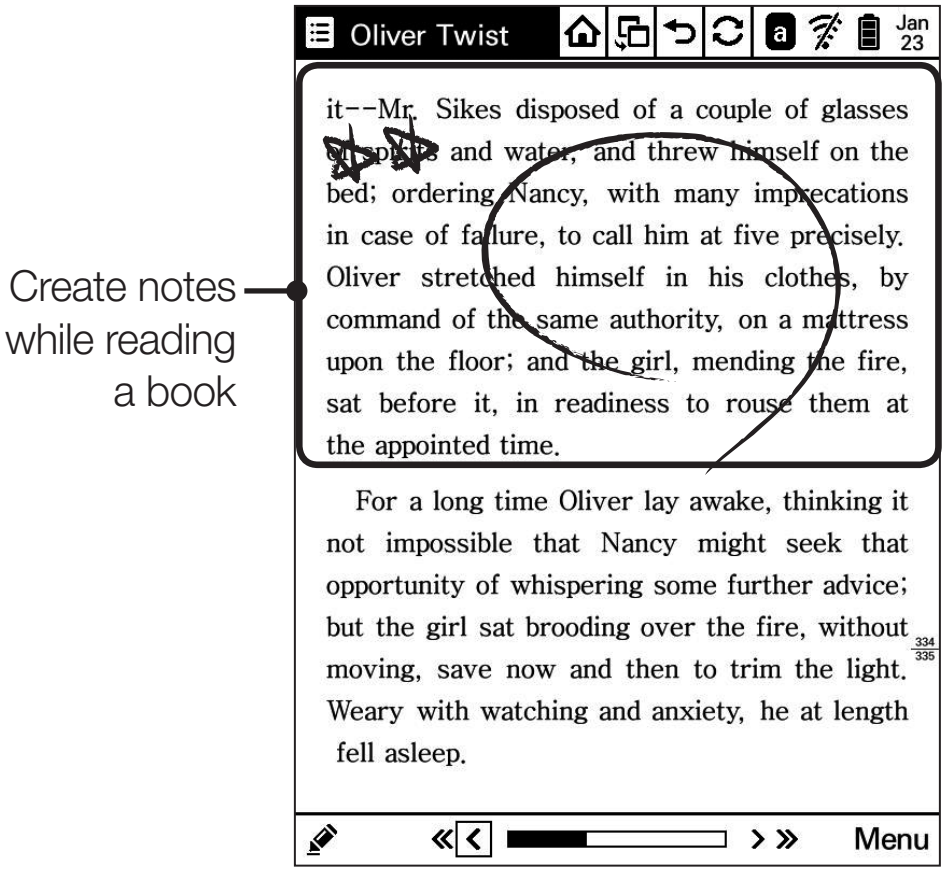
Create notes while reading a book
Oliver Twist
Jan 23
it--Mr. Sikes disposed of a couple of glasses of spirits and water, and threw himself on the bed; ordering Nancy, with many imprecations in case of failure, to call him at five precisely. Oliver stretched himself in his clothes, by command of the same authority, on a mattress upon the floor; and the girl, mending the fire, sat before it, in readiness to rouse them at the appointed time.
For a long time Oliver lay awake, thinking it not impossible that Nancy might seek that opportunity of whispering some further advice; but the girl sat brooding over the fire, without moving, save now and then to trim the light. Weary with watching and anxiety, he at length fell asleep.
334
335
Menu

Icon	Function
	Create notes while reading a book • Parts of memos drawn on images may seem to be remaining after erasing by the stylus. Tap to erase the afterimage.
	View the previous or next page • You can also turn pages by pressing PREV PAGE or NEXT PAGE.

Icon	Function
«/»	Skip to the previous or next chapter (Book Flipping Option → p. 98) • You can also skip chapters by pressing and holding PREV PAGE or NEXT PAGE.
	View the current page or move pages • You can jump to any pages by tapping the box and put the page number, and then tap **GO**.
Menu	Open menus • **Add Bookmark/Delete Bookmark**: Add or delete a bookmark (p. 51) • **Font Size**: Select a font size • **Rotation**: Rotate the current page • **Zoom In/Zoom Out**: Zoom in or out • **Crop On/Crop Off**: Crop a part of a PDF file to enlarge it • **Chapter**: View the current chapter • **Auto Alignment On/Auto Alignment Off**: Automatically align text in a file • **Bookmarks&Notes**: View a list of notes • **Search**: Search for a word or phrase

Icon	Function
	• **Add page memo/Edit page memo**: Create and edit a note • **My Impressions**: Note your impressions about the book • **Full Screen On/Full Screen Off**: View a book in full-screen mode or exit full-screen mode • **Hide Note/Show Note***: Hide or show notes • **TTS**: Use the text-to-speech feature to read the book aloud • **Screen Share On**: View a book file from the TV screen (p. 50)

* It will appear only on the page with note contents.

- The following features are available only for selected file formats:
  - Font Size, Search, TTS: ePub, TXT
  - Zoom In/Zoom Out, Crop On/Crop Off: PDF
  - Auto Alignment On/Auto Alignment Off: TXT
- If a PDF file contains unsupported fonts, portions of the file may be unavailable.
- You can view content files written in English, French, Spanish, Italian, and Dutch.
- The TTS function supports English, and the device should be set to the same language of the book file.

Use a shortcut button when reading a book

To use a shortcut button, press Fn and then press a number button.

Number	Function
1	Add or delete a bookmark (p. 51)
2	Select a font size
3	Search for a word or phrase

Number	Function
4	Rotate the current page
0	Open a window to enter a special character when searching for a word or phrase

Use a library

Add books to a library

Store a book to the library you want.

1. From the Home screen, tap **Books**.
2. Tap **Menu** → **Add to Library**.
3. Tap at the right of a book you want to add.
4. Tap a library.
   - To add a new library, tap **New Library**. You can enter up to 64 letters for the title.
5. Tap **OK**.

View books by library

You can select a library and read a book from the library.

1. Form the Home screen, tap **Books**.
2. Tap **My Library**.
3. Tap a library.
4. Tap a book.

Crop a PDF file

Crop a part of a PDF file to enlarge it.

When you crop a part of a PDF file, notes and highlights you saved will be deleted, and the TTS function will not work.

1. From the Home screen, tap **Books**.
2. Tap a PDF file to view.
3. Tap **Menu** → **Crop On**.
4. Tap a starting point to crop.
   - To cancel the cropping, tap **X**.

5 Tap an ending point to crop.

6 Check the part of the file you cropped.

To return to the original view tap **Menu** → **Crop Off**.

View the table of contents

Tap **Menu** → **Chapter** to view the table of contents for the current document.

Access a specific page

Tap the bar at the bottom of the screen and enter a page number.

Send or receive a book via EmoLink

Send or receive a file between devices by pressing EmoLink while viewing book files or book file list. (p. 26)

You can not send a content file with Digital Rights Management (DRM).

View content files on a TV screen

You can view content files only on Samsung TVs that support AllShare. You can not view DRM-protected files on a TV screen.

To view content files on a TV screen,

1. Tap the top right corner of the screen and turn the wireless network on.
2. From the Home screen, tap **Books**.
3. Tap **Menu** → **Screen Share On**.
   - The device will automatically search for other devices connected to the same network and attempt to connect to them.
4. Select a book from the TV screen using the TV remote control.
   - Press HOME to exit the screen share mode.

Use bookmarks

Add bookmarks to save your page and quickly return to it later.

Add a bookmark

Add a bookmark at an important location.

While reading a book, tap **Menu** → **Add Bookmark**.

Or, tap the upper-right corner of the page to add a bookmark.

- will appear at the top right of the screen.

View a bookmark or note

Directly access a bookmarked page or view a note.

While reading a book, tap **Menu** → **Bookmarks&Notes**.

Delete a bookmark

Delete a bookmark previously added.

While reading a book, tap **Menu** → **Delete Bookmark**.

Or, tap the bookmark icon to delete the bookmark.

- The bookmark will be deleted.

Use highlights

While reading a book, you can highlight text with the stylus. You can also add memos to highlighted text.

The following features are not available on a PDF file format: text highlight, instant dictionary and notes.

Highlight a text

Drag the stylus across words or lines to highlight them.

- A dictionary can be displayed at the bottom of the screen when you use the highlight function. (Look up a word → p. 77)

Remove a highlight

1. Tap highlighted text with the stylus.
2. When the pop-up window appears, tap **Delete Highlight**.
3. When the pop-up window appears, tap **Yes**.

Add a memo to highlighted text

1. Tap highlighted text with the stylus.
2. Tap **Add memo**.
3. When the memo input window appears, create a memo and then tap .
   - will appear next to the highlighted text. (Tap to edit the memo.)

Highlight all the same words of highlight text

1. Tap highlighted text with the stylus.
2. Tap **Search the word**.
   - All the same words on the book will be highlighted.
   - To see the page of the highlighted word, tap </>.

Look up highlighted words in the dictionary

1. Tap highlighted text with the stylus.
2. Tap **Search in the Dictionary**.
3. View the definitions, idioms, and usage examples for the word.

When you want to search for a word directly, enter the word in the input field at the bottom of the screen.

Delete books

To delete a book file,

1. From the Home screen, tap **Books**.
2. From the book list screen, tap **Menu** → **Edit**.
   - will appear in the book list.
3. Tap at the right of a book that you want to delete.
4. When the pop-up window appears, tap **Yes**.
   - To exit the edit mode, tap .

Bookstore

Purchase and download content files from a bookstore. To access the bookstore on the device, it must be connected to a wireless network. (p. 94)

For details about the bookstore, refer to a separate bookstore guide.

Notes

Save important information by creating notes. You can add new note pages to existing notes and manage notes by folder.

Create notes

Create pages in a single note

When you access **Notes**, the note list appears. You can create up to 99 pages in a single note.

1. From the Home screen, tap **Notes**.
2. Select a newly created note dated today from the list.
   - Tap to add a new note.
3. Using the stylus, write a note in the text input field.
   - You can not use the keyboard to make a note. Use the stylus.
   - Tap to add a new page.

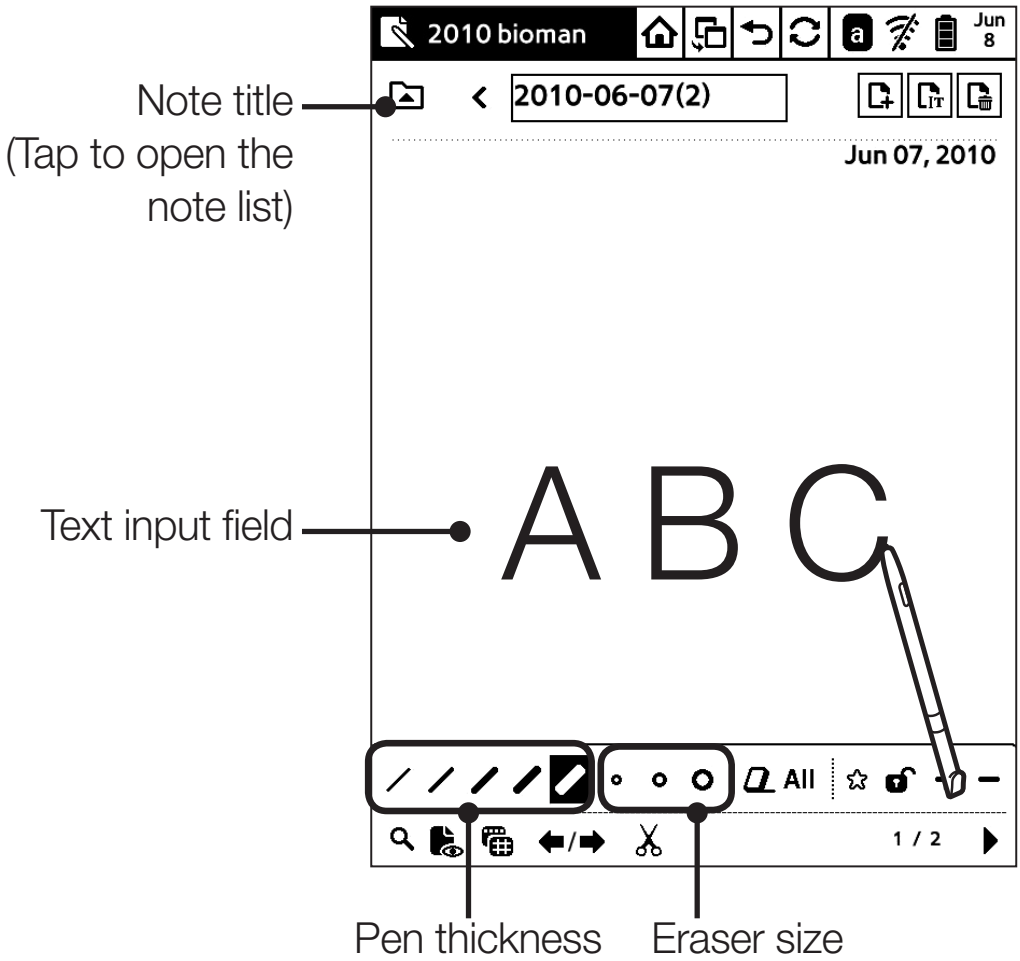

Icon	Function
	View a list of saved notes
	Create and save a new note
	Modify a note title • Press the buttons on the keyboard to enter a title. The title can be up to 64 letters, and you can not enter some special characters.
	Delete notes

Icon	Function
All	Delete all text in the current page
☆/★	Bookmark (★) the current note page/Clear a bookmark
/🔒	Lock page/Unlock page
+/−	Add a new page/Delete the current page
🔍	Search for note contents
	View your notes by page
	Select layouts
←/→	Cancel the previous action/Recover the canceled action
✂	Crop a part of notes
1 / 2	Current page/Total number of pages (Enter a page number to move directly to that page)

When you access a note during music playback, you can adjust the volume by pressing Fn and the 5 and 6 number buttons. In this case, volume control bar remains invisible.

Send or receive a memo via EmoLink

From the creating notes screen, press EmoLink to send or receive files between devices. (p. 26)

Bookmark pages in a single note

Bookmark note pages to easily locate and refer to them later.

On any note page, tap ☆ at the bottom of the screen.

- To clear the bookmark, tap ★.

Icon	Function
★	Bookmark added
☆	Bookmark cleared

To see bookmarks, from the note creation screen, tap and then tap the ★ **Pages** tab.

Lock pages

Protect your private notes with a password. The default password is 0000. (p. 37)

On any note page, tap in a page.

- To unlock pages, tap .

Icon	Function
	Locked page
	Unlocked page

Search for note contents

1. From the page creation screen, tap .
2. Enter a keyword, and tap or press .
3. View the contents.

Crop a note page

Crop a part of a note page to copy or delete it.

1. From the page creation screen, tap .
2. Select a part to crop.

3 Select an editing tool.

Icon	Function
	Delete the selected area
	Copy the selected area
	Cancel the selection

4 Check the edited page.

- When you select , copied part will be saved to the clip board. Tap to select copied part and point where to paste.

Create notes

Create new notes. You can create up to 99 notes in a folder.

1 From the Home screen, tap **Notes**.

2 Tap **Menu** → **New Note**, or tap .

- Tap to view a list of notes from the page creation screen.

3 Write a note in the new page.

- Tap to add more pages to a note.

View notes

View or manage your notes by pages, notes, and folders.

View note pages

1 From the page creation screen, tap .

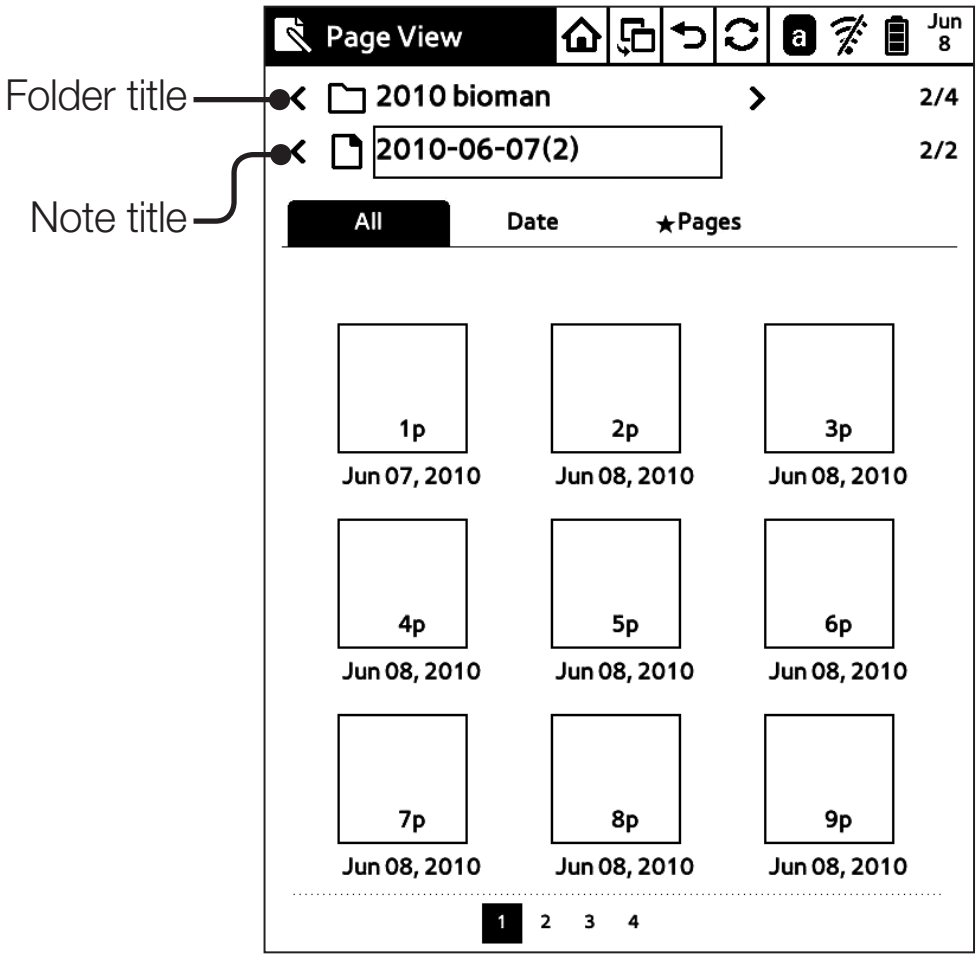

2 Tap a tab.

Tab	Function
All	View all saved pages
Date	View pages by date • To view a page created today, tap Today.
★ Pages	View bookmarked pages (p. 60)

3 Tap a page.

- To jump to another page, tap ❮ or ❯, or the folder title and select a folder.

4 View the page.

- To create a new note page, tap +. (Create pages in a single note → p. 57)

View notes

1. From the page creation screen, tap .
2. Tap a note.
   - To jump to another page, tap ❮ or ❯, or the folder title and select a folder.
   - From the note list, tap **Menu** to use the following options.

Option	Function
New Note	Create a new note
Page View	Change the view mode
Search	Search for a note content
Sort	Select a sort option (By Alphabet, By Creation Date, By Access Date, By Access Frequency)
View	Select how to view notes (List, Thumbnail)
Edit	Move a note to another folder or delete a note

View notes by folders

Manage your notes by folders. You can add or delete folders.

1. From the Home screen, tap **Notes**.
2. Tap ❮/❯ to select a folder.
   - To view all folders, tap a folder title and select **All Folders**.

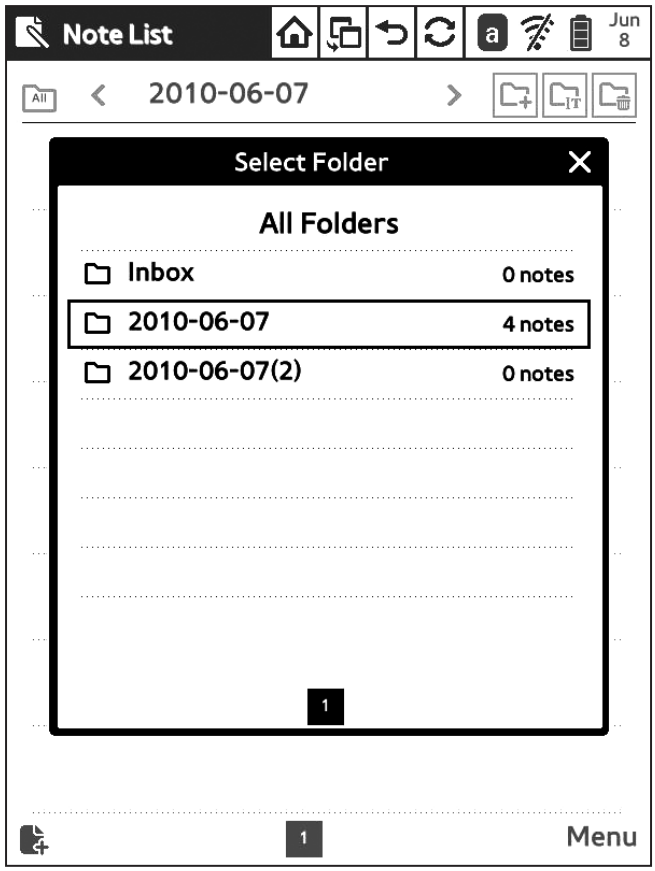

Icon	Function
	Create a new folder
	Change a folder title • The title can be up to 64 letters and you can not enter some special characters.
	Delete a folder • You can not delete **Inbox**.

Delete notes

Delete notes and folders.

Delete notes

When you delete a note, all pages of the note will be deleted.

1. From the Home screen, tap **Notes**.
2. From the note list, tap **Menu** → **Edit**.
   - To view the note list while creating a note, tap .

3 Tap to delete notes.

- Tap to re-name or move notes to another folder.

4 When the pop-up window appears, tap **Yes**.

- To exit the edit mode, tap .

Delete folders

When you delete a folder, all notes of the folder will be deleted.

1 From the Home screen, tap **Notes**.

2 Tap to select a folder.

- To view the note list while creating a note, tap .

3 Tap .

4 When the pop-up window appears, tap **Yes**.

- To exit the edit mode, tap .

Calendar

Create events or anniversaries to manage your schedule. You can also view Microsoft Outlook schedules from your device.

Create events

To create an event,

1. From the Home screen, tap **Calendar**.
   - You can write your schedule directly on the month screen. Tap to show the writing tools.
2. Tap **Menu** to select a view mode.

Mode	Function
Year View	View a calendar by six months
Month View*	View by month
Day View	View by week
Today	View today's events

* The default setting of the **Calendar** is **Month View**. You can see this option in the **Year View** and **Day View** modes.

3 Tap a date and write details with the stylus.

- To move to today's date, tap Today in Month view.
- For **Year View** or **Month View**, tap and write directly on the calendar.
- For **Day View**, write on the preview and text input fields.
- You can not use the keyboard to enter event details. Use the stylus.

View events

View events in Month view

1 From the Home screen, tap **Calendar**.

2 Tap **Menu** → **Month View**.

3 Tap ❮ or ❯ to scroll to a year or month.

4 Tap a date.

- Dates with an event will be marked with ◥ in the top right corner.

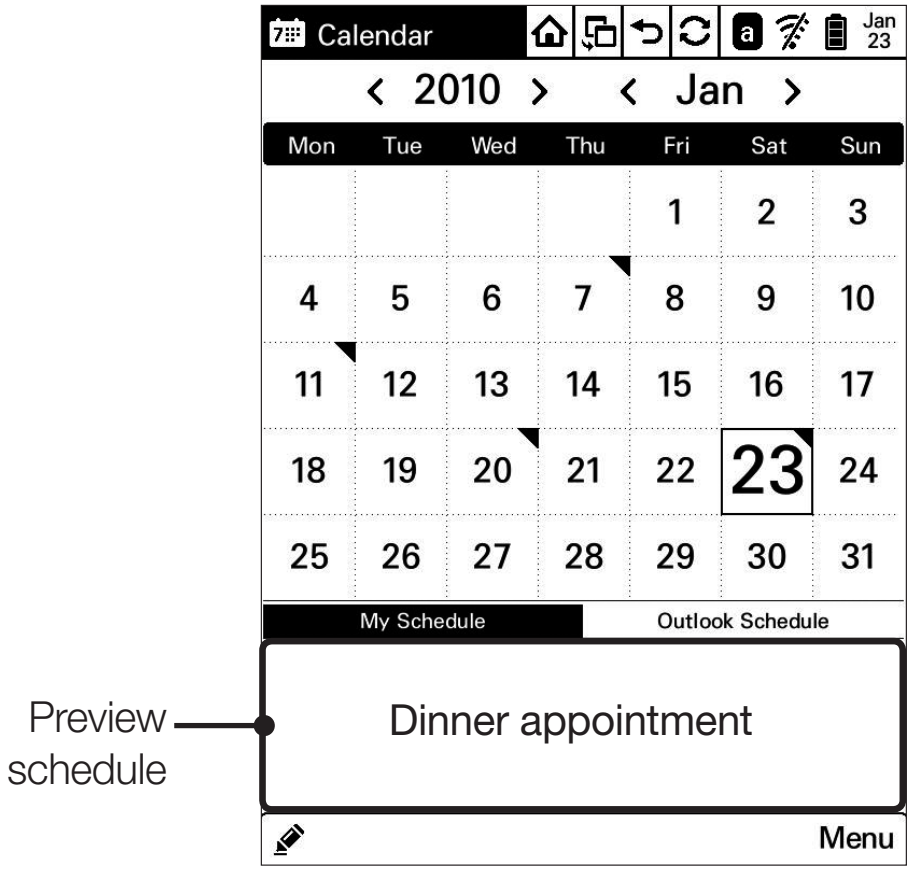

▲ Month View

View events in Day view

1 From the Home screen, tap **Calendar**.

2 Tap **Menu** → **Day View**.

3 Tap ‹ or › to scroll to a week.

4 Tap a date.

- Dates with an event will be marked with ◥ in the top right corner.

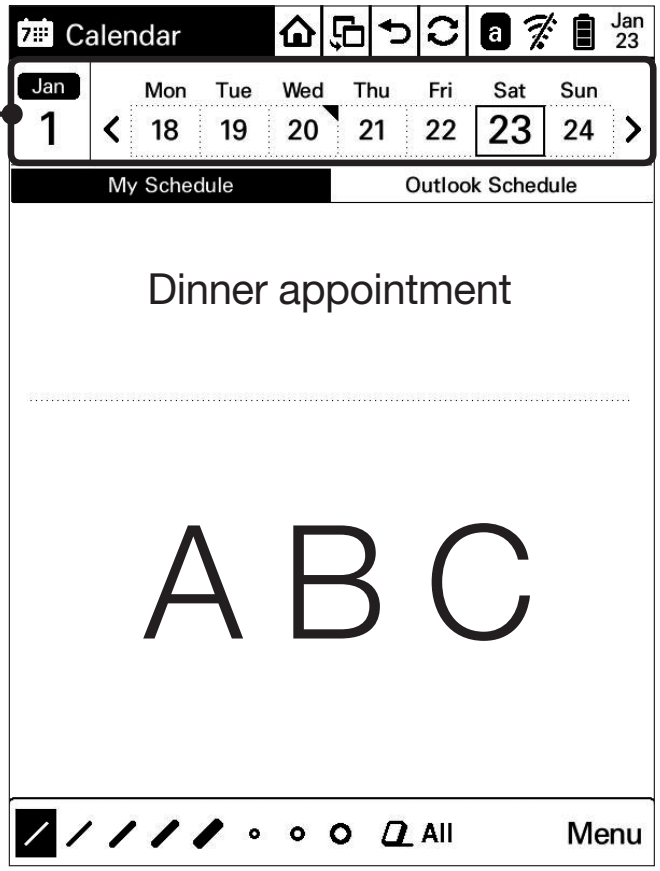

▲ Day View

To go back to Month view, tap Jan 1 on the top left of the screen.

Delete events

To delete an event,

1. From the Home screen, tap **Calendar**.
   - You can edit your schedule directly on the calendar. Tap to show the writing tools.
2. Tap **Menu** to select a view mode.

Mode	Function
Year View	View by six months
Month View*	View by month
Day View	View by week
Today	View today's events

* The default setting of the **Calendar** is **Month View**. You can see this option in the **Year View** and **Day View** modes.

3. Tap a date.
4. Tap → **Yes** to clear all inputs on the selected date.
   - Tap an eraser size and use the stylus to delete your inputs.

Although you delete inputs with an eraser, ◥ will still appear on the calendar date.

View Microsoft Outlook schedules

Synchronize the device with Microsoft Outlook to view your schedules on the device. This feature allows you to view schedules but does not allow you to edit or delete the schedules from the device.

Install Samsung Outlook Sync

1. Insert the CD-ROM into an appropriate drive on your PC.
2. Click **Samsung Outlook Sync** and follow the on-screen instructions to install the program.

Synchronize your schedules

1. Launch the Microsoft Outlook program and enter your user ID and password to log in.
2. Enter your schedules.

3 Double-click the Samsung Outlook Sync icon on the desktop to launch the program.

4 Connect the device to a PC with the USB cable and tap **Yes**.

5 Click **Sync** on the desktop to synchronize schedules with Microsoft Outlook.

- Schedules in Microsoft Outlook will be transferred to your device.

6 Disconnect the USB cable when the synchronization is complete.

View Microsoft Outlook schedules on the device

1. From the Home screen, tap **Calendar**.
2. Tap **Menu** → **Month View** or **Day View**.
3. Tap **Outlook Schedule**.
4. Tap a date to view details.
   - You can not edit the schedules on the device.

▲ Month View

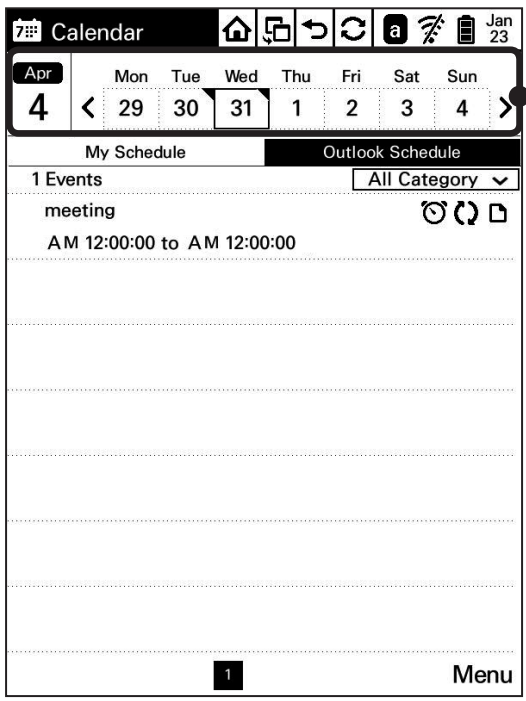

▲ Day View

Dictionary

Look up the meaning of a word, save searched words, and add words to your word list.

Look up a word

To look up a word in the dictionary,

1. From the Home screen, tap **Dictionary**.
2. Enter a word in the input field and tap ↵ or press ENTER.
   - Words you have searched for previously will be listed.
3. Select a word.
4. View the search result. (p. 78)
   - To see idioms or examples related to the word, tap **Idioms** or **Examples**.

- While you are viewing a book or dictionary, it may be more convenient to use the instant dictionary function. (p. 78)
- Supported dictionary: Collins English-English dictionary

Use the instant dictionary function

While reading text, tap a word with the stylus.

- The dictionary screen will appear with English expressions or definitions.
- If you tap a word on the page you are reading with the dictionary screen opened, the device will activate the dictionary function.

View search results

To view search results,

1. From the search result screen, tap a tab you want.

Tab	Function
All	View all search results
Idioms	View idioms only
Examples	View examples only

2. View the search results.

3 Use the following icons.

Icon	Function
	Add to your word list
	View your word list

While you are viewing a book or dictionary, it may be more convenient to search for a word using the highlight function. (p. 52)

Add to your word list

To add words to your word list,

1 From the search results screen, tap .

2 When the pop-up window appears, tap **OK**.

- You can add up to 1000 words to your word list. This limit may change depending on the available capacity of your device.

Open your word list

To open your word list,

1. From the dictionary screen, tap .
2. Tap **By Latest Search** or **By Alphabet**.
   - To delete a word, tap .
3. Tap a word.

Music

Listen to stored music files in MP3 (ID3 v 2.3 supported) format.
(Copy files → p. 22)

Play music files

To play music files,

1. From the Home screen, tap **Music**.
2. Tap a list of music.

Folder	Function
My Playlist	Music files you have added to your custom playlist
Relaxing Sound	Music files categorized as relaxing
Inbox	Music files received via EmoLink

- To change how to view the list of music, tap **Menu** → **View**.

3. Tap a music file.

4 Listen to music and use the following icons.

- You can use shortcut buttons to control playback conveniently. (Use shortcut buttons while listening to music → p. 83)

Icon	Function
▶/❙❙	Play/Pause
◀◀/▶▶	Scan backward/Scan forward
⏮/⏭	Skip to previous track/Skip to next track
1→	• 1→ : Play the current track once • 🔁1 : Repeat the current track • 🔁📁 : Repeat all songs in the folder • 🔁A : Repeat all songs
⤮/⤮	Shuffle music playback/Turn Shuffle off
Menu	• **Add to Playlist** : Add to **My Playlist** • **Shuffle On/Shuffle Off** : Turn Shuffle on or off • **Repeat**: None, Repeat 1, Repeat Folder, Repeat All

While listening to music, you can use other functions such as reading books or creating notes.

Send or receive music files via EmoLink

From the playing music or music list screen, press EmoLink to send or receive files between devices. (p. 26)

Use shortcut buttons while listening to music

Press Fn and then press a corresponding number button to control playback while listening to music.

Number	Function
5	Adjust the volume down
6	Adjust the volume up
7	Skip to previous track
8	Pause playback/Resume playback
9	Skip to next track

When you use other functions while listening to music, you can also use shortcut buttons.

Delete music files

To delete a music file,

1. From the Home screen, tap **Music**.
2. Tap **Menu** → **Edit**.
3. Tap at the right of a music file that you want to delete.
4. When the pop-up window appears, tap **Yes**.
   - To exit the edit mode, tap .

You can not delete music files stored in the **Relaxing Sound** folder.

Images

View images (BMP, JPG and JPEG formats) saved on the device. You can also view zipped files of images similarly to book files.
(Copy files → p. 22)

View images

View images

1. From the Home screen, tap **Images**.
2. Tap an image list.
   - Tap **Menu** to use the following options.

Option	Function
Sort	Select how to sort images (By Date, By File Name)
View	Select how to view the list of images (List, Thumbnail)
Edit	Delete images

3. Tap an image.

4 View the image.

- To write a memo on the image, tap .
- Tap **Menu** to use the following options.

Option	Function
Zoom	Zoom in (x1.0, x1.2, x1.5, x2.0) • You can also zoom in by pressing Fn and then the 2 number button.
Aspect Ratio	Adjust the ratio of an image (Original Fit, Auto Fit, Fit to Screen)
Full Screen On/ Full Screen Off	View an image in full-screen mode or exit full-screen mode
Hide Scribble/ Show Scribble*	Hide or show memos on an image

* This option will appear only when you write a memo on the image. (This option will remain available even after you delete a memo.)

- The maximum pixel value supported by the device is 12 mega-pixels for the JPG and JPEG formats, and 6 mega-pixels for the BMP format. You can automatically optimize image size and file formats with the Virtual Printer provided on the CD-ROM. (Install and use the Virtual Printer → p. 103)
- If an image title is over 256 bytes, any memo you write on the image will not be saved.

Send or receive image files via EmoLink

Send or receive a file between devices by pressing EmoLink in the viewing image, image list, or thumbnail screens. (p. 26)

View zip file images

You can view zipped files of images. When JPG/JPEG/BMP image files are zipped, the maximum pixel value supported by the device is 6 mega-pixels for each file.

To view zip file images,

1. From the Home screen, tap **Images**.
2. Tap a zip file.
3. Navigate the image files with the following icons.

Icon	Function
	View the previous or next image • You can also view images by pressing PREV PAGE or NEXT PAGE.
	Skip to the first or last image • You can also skip to the first or last image by pressing and holding PREV PAGE or NEXT PAGE.

Customize settings for zip file images

1. While viewing the zip file images, tap **Menu**.
2. Tap a menu to customize the following settings.

Option	Function
Enhance Image	Adjust the contrast of the image
View	Change how to view images (Original, Page Split (L → R), Page Split (R → L))
Add Bookmark/ Delete Bookmark	Add or delete a bookmark
Bookmarks	View bookmarked images
Series View	View the next image file manually or automatically (On, Off, Check Everytime)
Zoom	Zoom in (x1.0, x1.2, x1.5, x2.0)
Full Screen On/ Full Screen Off	View an image in full-screen mode or exit full-screen mode

Delete images

To delete an image,

1. From the Home screen, tap **Images**.
2. Tap **Menu** → **Edit**.
3. Tap at the right of an image that you want to delete.
4. When the pop-up window appears, tap **Yes**.
   - To exit the edit mode, tap .

Settings

Customize the screen settings, such as language, startup mode timer, wireless network settings, and EmoLlink settings. Manage the device by updating firmware or resetting.

To customize settings,

1. From the Home screen, tap **Settings**.
2. Tap a tab.

Tab	Function
All	View menus over all tabs
General	Customize settings for **Language**, **Clock Set**, **Change Password**, **Device Lock**, **Sleep Timer**, **Auto Power Off**, **Startup Mode**
Network	Customize settings for **Wi-Fi**, **Auto Wi-Fi Off Timer**, **EmoLink**
App.	Customize settings for **Instant Dictionary**, **Book Flipping Option**, **Auto Refresh**
Support	Update the firmware, reset the device, and view device information

3. Tap an option to customize the setting.

General

Language	Select a display language. (p. 36)
Clock Set	Set the current time and date. (p. 37)
Change Password	Change the password for the lock function. (p. 37)
Device Lock	Set the device to be locked automatically when it is switched on. • To unlock the device, you must enter your password.
Sleep Timer	Set the screen to lock automatically when the device is not used for a specific length of time. (**5 Minutes**, **10 Minutes**, **20 Minutes**, **30 Minutes**)
Auto Power Off	Set the device to automatically switch off 30 minutes after entering sleep mode.

Startup Mode	Select a menu to be displayed when the device is switched on. • **Home**: Display the main menu screen. (p. 31) • **Last Mode**: Display the last function you were using. • **Continue Reading**: Display the last book you were reading. In **Continue Reading** mode, if you reboot the device while reading a book, it may take some time to load the last page you were reading.

Network

Wi-Fi	When you connect the device over the wireless network, you can purchase books from online bookstores or download content files, 1 Select **On**. 2 Select an available Wi-Fi network. 3 Enter the password and tap **Yes**. 4 When Wi-Fi is connected, download various content files. If you tap the wireless network antenna area at the top of the screen, you can view the current time and turn the Wi-Fi feature on or off directly. (p. 34)

	Customize proxy server settings To connect to the wireless network with a proxy server, you must first customize the proxy server settings. 1 Tap **Proxy Server**: **Off**. 2 Tap **On**. 3 Enter the URL address and port number and then tap **OK**. • If you enter an empty space by pressing [ ] in the server URL field, the server URL will not be saved. • You can enter from 1 to 65535 for port number. For the URL address and port number of the proxy server, contact your network administrator.
Auto Wi-Fi Off Timer	Set the device to disconnect the wireless network after a specified interval. (**10 Minutes**, **20 Minutes**, **30 Minutes**, **Off**) • You can set an alarm message to appear when the wireless network is disconnecting. Tap ☑ next to **Turn on the alarm message**.

EmoLink	Customize EmoLink settings. • **EmoLink**: Turn on or off. • **Device Name**: Register or edit the device name that is shown when the device is connected to another device. • **Change Group**: Add or change an EmoLink group. Also, set whether or not devices from other groups are allowed to connect. - You can enter up to 60 characters with alphabet or numbers for the group title. • **Connect Mode**: Select an EmoLink connection mode. - **Direct Mode**: Automatically connect with any EmoLink-enabled device within range.

- **AP Mode**: Automatically search for and connect to wireless networks.

- When connected to a wireless network in **AP Mode**, your device attempts to connect to the network to which you previously connected. If it fails, the device will connect to the unsecured network with the strongest signal. To select a wireless network manually, tap **Settings** → **Network** tab → **Wi-Fi** and then tap **On**.
- When connected to a wireless network in **AP Mode**, only devices on the same network are allowed to transfer files via EmoLink.

- You can enter up to 32 characters with alphabet or numbers for SSID.
- You can enter only letters and numbers for WEP password. The size will be limited to 5, 10, 13, 26 bytes depending on the wireless network.

	• **Learn How to Use** : View helpful instructions for using EmoLink. • **Direct Network Settings**: Select a direct connection mode. - **Auto**: The device attempts to connect to automatically an EmoLink-enabled device. - **Manual**: Manually enter SSID and WEP passwords when connecting directly to a device.

App.

Instant Dictionary	Set to look up words instantly when you tap them on the reading screen. (p. 78)
Book Flipping Option	Specify the action taken when you press and hold PREV PAGE or NEXT PAGE, or tap « or » while reading a book. (**Chapter**, **Bookmarks&Notes**)

Auto Refresh	Set an interval to refresh the screen while reading a book. (**Every Page**, **Every Third Page**, **Every Fifth Page**, **Every Tenth Page**, **Off**) • The screen turns off and on quickly at every refresh interval. • Due to the electronic paper capabilities of the touch screen, your device may have afterimages. Tap to refresh the screen whenever needed.

Support

Update Firmware	Update your device with the most recent firmware. (p. 105)
Reset	Reset all settings to the factory defaults. (p. 101)

Information	• **Product Information** : Enter or edit the device name, and view the model name, firmware version, manufacturer information, and MAC address. • **Memory Information** : View used and available memory. • **User Information** : Enter your personal information. (name, company, phone, and email address) - You can enter up to 64 bytes with letters, numbers, or special characters for each user information field.

Appendix

Reset the device

Reset the device using the reset button

If the device does not respond properly or will not turn off, press the reset button with your stylus to reset the device. Your saved files and customized settings will not be affected.

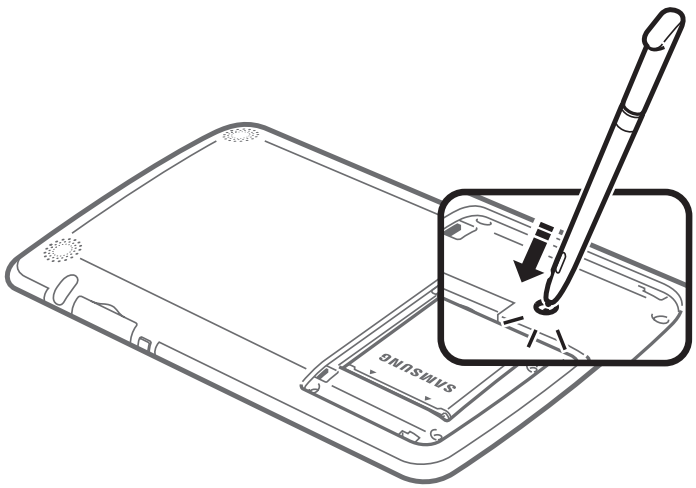

Reset all settings

Reset all settings to the factory defaults.

1. From the Home screen, tap **Settings**.
2. Tap **Support** tab → **Reset**.
3. Tap an option.

Option	Function
Reset to Default Settings	Reset the settings that you have customized
Delete All Data	Reset the device to the factory default settings

Although you reset the device, your password, the time, and the product and user information you saved will not be affected.

4 When the pop-up window appears, tap **Yes**.

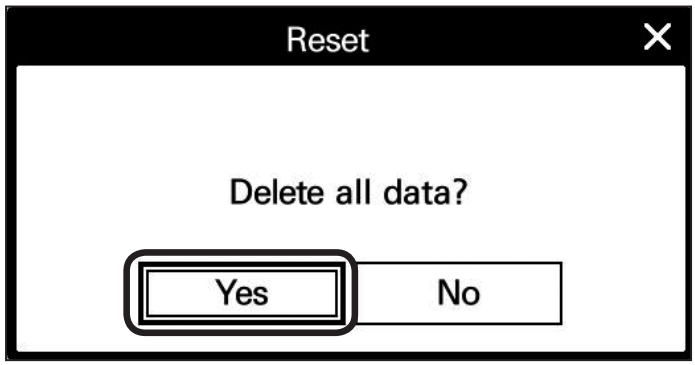

▲ When you select **Delete All Data**

5 When the reset is complete, tap **OK**.

Install and use the Virtual Printer

The Virtual Printer program is provided on the supplied CD-ROM. You can use this program to optimize book and image files for viewing on your device.

Install Virtual Printer

1. Insert the CD-ROM into an appropriate drive on your PC.
2. Click **Virtual Printer** and follow the on-screen instructions to install the program.
   - From the default printer setting screen, click **No** to install Virtual Printer or **Yes** to install and set Virtual Printer as a default printer.
3. When the installation is complete, connect the device to the PC with the USB cable.

- The Virtual Printer program can be used only with your device.
- To directly convert book or image files without the need to change printer settings, set the Virtual Printer as the default. To print files, you must select a physical printer.

Use Virtual Printer

1. Connect the device to a PC with the USB cable.
   - The pop-up window appears.
2. Tap **Yes**.

3 Open a book or image files on the PC.

4 Make the print order and select **Samsung Virtual Printer** from the name drop-down list.

5 When the **Samsung Virtual Printer** window appears, click **Print**.

- If the Samsung Virtual Printer window appears, select a location to save the output file, folder name, and a file format, and then click **Print**.
- Optimized files will be saved in the **Images** folder on your device. You can view optimized files by accessing the **Images** menu on your device.

Update firmware

Download and install the latest firmware from the Samsung Electronics web page http://www.samsung.com/

1. Connect the device to a PC with the USB cable.
2. When the pop-up window appears, tap **Yes**.

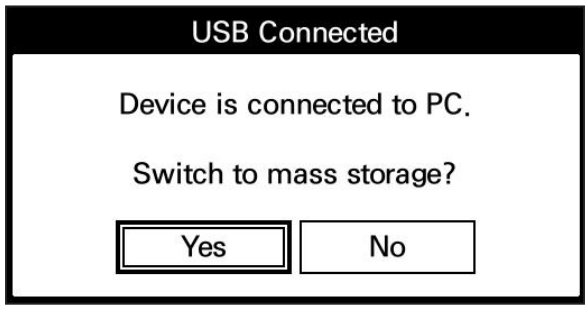

3. Visit the Samsung Electronics web page (http://www.samsung.com/) and enter your device's model name to search for the latest firmware.
4. Open **My Computer** on the desktop and double-click the removable disk icon.
   - The name of the removable disk may vary by PC.
5. Transfer the new firmware to the **Firmware_Update** folder. (Copy files → p. 22)
6. Safely remove the removable disk from the PC and disconnect the USB cable. (p. 25)
7. From the Home screen, tap **Settings**.

8 Tap **Support** tab → **Update Firmware**.

- The pop-up window appears.

9 When the pop-up window appears, tap **Yes**.

- The firmware will be updated.

- When the update is complete, the device will reboot automatically.
- Do not disconnect the USB cable or turn the device off while the update is in progress, as this may result in loss of data or damage to the device.
- You can check the current firmware by tapping **Settings** → **Support** tab → **Information** → **Product Information**. (p. 100)

Troubleshooting

If you are having trouble with your device, try these troubleshooting before contacting a service professional.

Issue	Resolution
I pressed the power button, but the device does not turn on.	• Connect the USB cable to charge the battery. • Disconnect the USB cable and then press the reset button with the stylus. (p. 101)
The device will not charge even with the USB cable connected.	Ensure that the USB cable is connected properly.
The device will not turn on even with the USB cable connected.	Check the connection between the device and the USB cable.
The screen always seems to be locked.	From the Home screen, tap **Settings** → **General** tab → **Sleep Timer** to change the time delay. (Sleep Timer → p. 92)
The time setting is not correct.	The current time settings may be lost when the battery discharges completely. Set the current time again. (p. 37)

Issue	Resolution
I can not see a downloaded or copied book in the book list.	Connect the USB cable and ensure the device is recognized as a removable disk. Then disconnect the USB cable to synchronize with a PC. (Copy files → p. 22)
The device turns off when I disconnect the USB cable from a PC during data synchronization.	Reset the device and then copy files to the device by connecting the USB cable. (Reset the device → p. 101, Copy files → p. 22)
I draw a curve, but it appears as a straight line.	Your device may not recognize your inputs correctly right after refreshing the screen. Wait until the refresh is complete.
Letters and images are not clear.	Tap .
Image files do not display on the screen.	The maximum resolution supported by the device is 12M. Image files with a higher resolution will appear in the file list, but the image itself can not be displayed on the screen.

Specifications*

Model name	E65	
Panel	Type	Active Matrix Electrophoretic Display
	Resolution	600×800 pixel
	Color	8 Level Gray Scale
Hardware	Flash memory	Available for a removable disk: 1.7 GB
	USB	Device 2.0
	Voltage	When connected to a PC: USB 5 V
	Battery	Li-Ion 1500 mAh
Touch screen	Type	EMR Pen Touch Type (Text Input, OSK supported)
Software	OS	Linux 2.6.29
Sound	Stereo 0.3w + 0.3w (Earphone supported)	
Wireless	Wi-Fi 802.11b/g	

Product	Dimensions (W x H x D)	125.5x194x13 mm
	Weight	212 g (including the battery: 244 g)
USB cable	Micro type	
File support	Books	ePUB, PDF**, TXT
	Music	MP3
	Images	BMP, JPG, JPEG (Progressive JPG is not supported)

* Specifications in the user manual are subject to be changed without prior notice.
* The wireless device can not provide services related to personal safety because of the possibility of radio interference.
* This device is a domestic DSRC (Dedicated Short Range Communication) wireless device.

** PDF files are not displayed properly if the files do not comply with the PDF/A standard.

Open Source License

- To send inquiries and requests for questions regarding open sources, contact Samsung via Email (oss.request@samsung.com).
- This product uses some software programs which are distributed under the Independent JPEG Group.
- This product uses some software programs which are distributed under the Freetype Project.
- This product uses some software programs which are distributed under the OpenSSL Project.
- This product uses some software programs which are distributed under the GPL/LGPL.
  GPL software: Linux Kernel, Busybox, Binutils, MPlayer, wpa_supplicant, U-boot, Wireless_tools
  LGPL software: Glibc, avahi

  To view unofficial translations of the GPL and LGPL, please visit the following link:
  http://www.gnu.org/licenses/old-licenses/gpl-2.0-translations.html
  http://www.gnu.org/licenses/old-licenses/lgpl-2.1-translations.html

The GNU General Public License (GPL) Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's

software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and th at you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the

Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a. You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b. You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c. If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute

the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a. Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b. Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c. Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not

compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

   If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

   It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

   Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR

DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the “copyright” line and a pointer to where the full notice is found.

One line to give the program’s name and a brief idea of what it does.
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w’. This is free software, and you are welcome to redistribute it under certain conditions; type `show c’ for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

signature of Ty Coon, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU Lesser General Public License (LGPL)

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc. 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors

who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy,distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problemsthat might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We

use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the “Lesser” General Public License because it does Less to protect the user’s freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users’ freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a “work based on the library” and a “work that uses the library”. The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called “this License”). Each licensee is addressed as “you”.

A “library” means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The “Library”, below, refers to any such software library or work which has been distributed under these terms. A “work based on the Library” means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term “modification”.)

“Source code” for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library’s complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a. The modified work must itself be a software library.

b. You must cause the files modified to carry prominent notices stating that you changed

the files and the date of any change.

c. You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d. If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

   If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a “work that uses the Library”. Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

   However, linking a “work that uses the Library” with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a “work that uses the library”. The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

   When a “work that uses the Library” uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

   If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

   Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a “work that uses the Library” with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer’s own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a. Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b. Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c. Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d. If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e. Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:
   a. Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
   b. Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.
8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.
10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.
11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and “any later version”, you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR

OTHER PARTIES PROVIDE THE LIBRARY “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the “copyright” line and a pointer to where the full notice is found.

<one line to give the library’s name and an idea of what it does.> Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a “copyright disclaimer” for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob’ (a library for tweaking knobs) written by James Random Hacker.

signature of Ty Coon, 1 April 1990
Ty Coon, President of Vice

That’s all there is to it!

LICENSE ISSUES

The OpenSSL toolkit stays under a dual license, i.e. both the conditions of the OpenSSL License and the original SSLeay license apply to the toolkit.

See below for the actual license texts. Actually both licenses are BSD-style

Open Source licenses. In case of any license issues related to OpenSSL

please contact openssl-core@openssl.org.

OpenSSL License

Copyright © 1998-2007 The OpenSSL Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgment: “This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (http://www.openssl.org/)”

4. The names “OpenSSL Toolkit” and “OpenSSL Project” must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org.
5. Products derived from this software may not be called “OpenSSL” nor may “OpenSSL” appear in their names without prior written permission of the OpenSSL Project.
6. Redistributions of any form whatsoever must retain the following acknowledgment: “This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (http://www.openssl.org/)”

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT “AS IS” AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

Original SSLeay License

Copyright (C) 1995-1998 Eric Young (eay@cryptsoft.com) All rights reserved.

This package is an SSL implementation written by Eric Young (eay@cryptsoft.com).

The implementation was written so as to conform with Netscapes SSL.

This library is free for commercial and non-commercial use as long as the following conditions are aheared to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com). Copyright remains Eric Young’s, and as such any Copyright notices in the code are not to be removed. If this

package is used in a product, Eric Young should be given attribution as the author of the parts of the library used. This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement: "This product includes cryptographic software written by Eric Young (eay@cryptsoft.com)" The word 'cryptographic' can be left out if the rouines from the library being used are not cryptographic related :-).
4. If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement: "This product includes software written by Tim Hudson (tjh@cryptsoft.com)"

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The licence and distribution terms for any publically available version or derivative of this code cannot be changed. i.e. this code cannot simply be copied and put under another distribution licence [including the GNU Public Licence.]

The FreeType Project LICENSE

2006-Jan-27

Copyright 1996-2002, 2006 by David Turner, Robert Wilhelm, and Werner Lemberg

Introduction

The FreeType Project is distributed in several archive packages; some of them may contain, in addition to the FreeType font engine, various tools and contributions which rely on, or relate to, the FreeType Project.

This license applies to all files found in such packages, and which do not fall under their own explicit license. The license affects thus the FreeType font engine, the test programs, documentation and makefiles, at the very least. This license was inspired by the BSD, Artistic, and IJG (Independent JPEG Group) licenses, which all encourage inclusion and use of free software in commercial and freeware products alike. As a consequence, its main points are that: o We don't promise that this software works. However, we will be interested in any kind of bug reports. ('as is' distribution) o You can use this software for whatever you want, in parts or full form, without having to pay us. ('royaltyfree' usage) o You may not pretend that you wrote this software. If you use it, or only parts of it, in a program, you must acknowledge somewhere in your documentation that you have used the FreeType code. ('credits')

We specifically permit and encourage the inclusion of this software, with or without modifications, in commercial products.

We disclaim all warranties covering The FreeType Project and assume no liability related to The FreeType Project. Finally, many people asked us for a preferred form for a credit/ disclaimer to use in compliance with this license. We thus encourage you to use the following text: """ Portions of this software are copyright ?<year> The FreeType Project (www.freetype.org). All rights reserved. """ Please replace <year> with the value from the FreeType version you actually use.

Legal Terms

0. Definitions : Throughout this license, the terms ‘package’, ‘FreeType Project’, and ‘FreeType archive’ refer to the set of files originally distributed by the authors (David Turner, Robert Wilhelm, and Werner Lemberg) as the ‘FreeType Project’, be they named as alpha, beta or final release. ‘You’ refers to the licensee, or person using the project, where ‘using’ is a generic term including compiling the project’s source code as well as linking it to form a ‘program’ or ‘executable’. This program is referred to as ‘a program using the FreeType engine’. This license applies to all files distributed in the original FreeType Project, including all source code, binaries and documentation, unless otherwise stated in the file in its original, unmodified form as distributed in the original archive. If you are unsure whether or not a particular file is covered by this license, you must contact us to verify this. The FreeType Project is copyright © 1996-2000 by David Turner, Robert Wilhelm, and Werner Lemberg. All rights reserved except as specified below.

1. No Warranty: THE FREETYPE PROJECT IS PROVIDED ‘AS IS’ WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL ANY OF THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY DAMAGES CAUSED BY THE USE OR THE INABILITY TO USE, OF THE FREETYPE PROJECT.

2. Redistribution: This license grants a worldwide, royalty-free, perpetual and irrevocable right and license to use, execute, perform, compile, display, copy, create derivative works of, distribute and sublicense the FreeType Project (in both source and object code forms) and derivative works thereof for any purpose; and to authorize others to exercise some or all of the rights granted herein, subject to the following conditions: o Redistribution of source code must retain this license file (‘FTL.TXT’) unaltered; any additions, deletions or changes to the original files must be clearly indicated in accompanying documentation. The copyright notices of the unaltered, original files must be preserved in all copies of source files. o Redistribution in binary form must provide a disclaimer that states that the software is based in part of the work of the FreeType Team, in the distribution documentation. We also encourage you to put an URL to the FreeType web page in your documentation, though this isn’t mandatory. These conditions apply to any software derived from or based on the FreeType Project, not just the unmodified files. If you use our work, you must acknowledge us. However, no fee need be paid to us.

3. Advertising: Neither the FreeType authors and contributors nor you shall use the name of the other for commercial, advertising, or promotional purposes without specific prior written permission. We suggest, but do not require, that you use one or more of the following phrases to refer to this software in your documentation or advertising materials: ‘FreeType Project’, ‘FreeType Engine’, ‘FreeType library’, or ‘FreeType Distribution’. As you have not signed this license, you are not required to accept it. However, as the FreeType Project is copyrighted material, only this license, or another one contracted with the authors, grants you the right to use, distribute, and modify it. Therefore, by using, distributing, or modifying the FreeType Project, you indicate that you understand and accept all the terms of this license.
4. Contacts: There are two mailing lists related to FreeType: o freetype@nongnu.org Discusses general use and applications of FreeType, as well as future and wanted additions to the library and distribution. If you are looking for support, start in this list if you haven’t found anything to help you in the documentation. o freetype-devel@nongnu.org Discusses bugs, as well as engine internals, design issues, specific licenses, porting, etc. Our home page can be found at http://www.freetype.org

Index

A

Adobe Digital Editions 38

B

Battery
- capacity 15
- charging 13
- inserting 11
- removing 13

Bookmarks 51

Books
- deleting 55
- downloading 23
- viewing 41
- viewing on TV screen 50

Bookstore 56

C

Calendar 69

Charging indicator 14

D

Dictionary
- adding words 79
- looking up words 77
- using instant function 78
- viewing search results 78
- viewing word list 78

E

EmoLink
- changing group 29
- initializing 26
- receiving files 28
- sending files 26

Events
creating 69
deleting 73
viewing 70

F

Files
copying 23
cropping and zooming PDF 48
downloading 56
receiving via EmoLink 28
sending via EmoLink 26

Firmware 105

H

Highlights
adding memos 53
looking up words 54
using 52

Home screen 31

I

Icons 35

Images
deleting 90
viewing 85
viewing zip files 87

M

Memory card 21

Menus
accessing 30
viewing books 41
viewing images 85

Music
deleting 84
playing 81

N

Notes
adding pages 57
bookmarking 60
creating 57
deleting 67
locking pages 60
viewing 63

O

Outlook
installing Samsung Outlook Sync 74
synchronizing schedules 74
viewing schedules 76

P

Password 37

R

Reset device 101

S

Secondary power connector 13
Settings
applications 98
changing 91
customizing 36
general 92
network 94
resetting to default 102
support 99
Stylus
storing 18
using 19

T

Touch screen
locking and unlocking 17

U

USB
charging 13
disconnecting 25

V

Virtual printer 103

W

Wireless network 34

Samsung service center	U.K	0845 SAMSUNG (7267864)
	SPAIN	902 - 1 - SAMSUNG (902 172 678)
	FRANCE	01 48 63 00 00
	ITALY	800-SAMSUNG (726-7864)
	NETHERLANDS	0900-SAMSUNG (0900-7267864) (€ 0,10/Min)
Samsung Electronics web page	http://www.samsung.com/	
Adobe	Contains Reader® Mobile technology by Adobe Systems Incorporated	